

Calculation of the Areas Most Likely to Appear Suitable for Communication Meteor Trails

Helen V. Kharchenko

Abstract—The method of calculation of the areas most likely to appear meteor trails with the electromagnetic waves specular reflection point for the radio links of different lengths is proposed. The linear electron density of the meteor trail, depending on the velocity and mass of the meteoroid, as well as zenith angles, defined by radiants of sporadic meteors and meteor showers are taken into account during calculating.

Keywords—meteor trail, specular reflection, linear electron density, radiant, zenith angle.

I. INTRODUCTION

IN order to design meteor communication system it is necessary to have an ability to calculate signal intensity in the receiving point and the areas most likely to appear in the zone of radio visibility of the meteor trails with the specular reflection point [1]–[3].

The aim of this work is to calculate the areas most likely to appear suitable for communication meteor trails for radio lines of different lengths, taking into account the basic radio physical parameters of the meteor trail [4]. Antenna orientation to these areas provides increasing of meteor radio links bandwidth.

The capacity of the meteor radio system is determined by the number of suitable for communication meteor trails and their duration. Suitable for communication meteor trail is ionized meteor trail with the linear electron density sufficient to ensure the required signal-to-noise ratio for given parameters of transmitting and receiving equipment, and on the meteor trail there is a radio waves specular reflection point [5]. The length of the trail, with the electron density is sufficient to information transfer, is called “effective length of the meteor trail.”

The electron density of the trail depends on the parameters of the meteoroid (mass, velocity, density and chemical composition) and is a function of height [1]. The condition of sufficiency level of the electron density determines the upper and lower limit of the meteor zone, within which the condition for communication. These boundaries and orientation of the meteor trail in space determine its effective length.

Specular point on the trail is formed, if the trail has a point of contact with the ellipsoid with focuses at the transmitting and receiving points [5]. Since the radiants of meteor showers and sporadic meteors has appropriate probability distributions [1], zenith angles and reduced azimuths (angle measured relative to the axis of the ellipsoid, but not in the direction “north”) of the meteor trail are random. Location and size of

the areas most likely to appear in the radio visibility zone of meteor trails with a specular reflection point (“hot areas”) will depend on the length of the radio, as well as time of day and year [5].

Location and size of the “hot areas” for meteor showers and sporadic meteors allows to select the right orientation and beam-width of transmitting and receiving antennas for different lengths of radio, and thereby to provide maximum bandwidth of meteor radio systems.

II. ESTIMATOR OF EFFECTIVE METEOR TRAIL LENGTH

A. Calculation of the Linear Electron Density

During entering into the Earth atmosphere meteoroid ablation process occurs. Atoms and molecules left the surface of meteoric object continue their movement, and coming into collision with atmosphere molecules give rise to free electrons and ions. The number of free electrons per length unit of meteor trail defines linear electron density α . Its variation along meteor trail defined by the expression [1]–[3]

$$\alpha(h) = 4.03 \cdot 10^{14} \frac{m(v - 8.15)^3}{H} \cdot \cos \gamma \cdot z(t), \quad (1)$$

where m and v are mass and velocity of meteoroid during entering in the meteor region

$$z(t) = \frac{9}{4} e^{-t} \left(1 - \frac{1}{3} e^{-t} \right) \quad \text{when} \quad -\ln 3 \leq t \leq 1.7, \quad (2)$$

else $z(t) = 0$.

t defines as $t = (h - h_{max})/H$,

where h is the atmosphere height,

h_{max} is the height with maximum linear electron density α_{max} ,

H is reduced atmosphere height [3] $H = 6.4 + 0.09(h - 95)$.

The height of the ionization maximum is given by the relation [3]

$$h_{max} = 47.4 + 12.76 \ln v. \quad (3)$$

Maximal linear electron density α_{max} is defined by empirical expression [2]

$$\alpha_{max} = 4.03 \cdot 10^{14} \frac{m(v - 8.15)^3}{H} \quad (4)$$

Figure 1 shows the graphs of linear electron density along the meteor trail, formed by the meteoroid with mass 0.5 g, entering the atmosphere at velocities of 40–70 km/s, calculated by the formula (1).

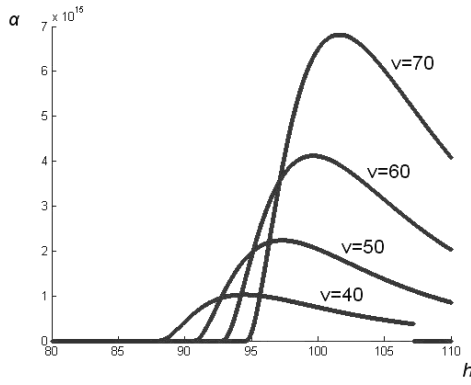


Fig. 1. Linear electron density versus height.

B. Calculation of the Effective Length of the Meteor Trail

Based on the obtained dependence of the electron density versus height can be calculated the effective width of the meteor region at the given parameters of radio and, according to zenith angle of meteor trail, the effective length of the meteor trail.

The effective length of the meteor trail is determined by the linear electron density sufficient to provide the required signal-to-noise ratio for given parameters of transmitting and receiving equipment and zenith angle of the meteor trail.

The probability of signal detection scattered by the meteor trail depends on power of the receiving signal and the noise level on the given frequency. Define minimum value of the linear electron density of the ionized meteor trail which provides required signal-to-noise ratio depending on meteor communication system parameters.

During reflection from underdense meteor trail the signal power in the input of the receiver has the form [5]

$$P_{rv} = \frac{P_{tr} G_{rv} G_{tr} \sigma \lambda^3 \alpha^2 \cos^2 \mu \exp\left(-\frac{8\pi r_0}{\lambda \sec^2 \theta}\right)}{(4\pi^3) r_{tr} r_{rv} (r_{tr} + r_{rv}) (1 + \sin^2 \theta \cos^2 \gamma)} \quad (5)$$

where P_{tr} is transmitter power;

G_{tr}, G_{rv} are transmitter and receiver antennas directivity gains;

$\sigma = 10^{-28} \text{ m}^2$ is an absolute cross-section of electron;

λ wavelength;

α is linear electron density;

μ is the angle between electric field vector of incident wave and trail axis;

θ is transmitted wave trail input-phase angle; r_0 is the initial radius of meteor trail;

γ is the angle between the meteor trail and the plane traced across receiving, transmitting points and reflecting point of the meteor trail;

r_{tr}, r_{rv} are distances between transmitting antenna and reflecting field, receiving antenna and reflecting field.

The initial radius of meteor trail could be found by the following empirical formula [2]

$$r_0 = 1.65 \sqrt{\frac{v}{40} \cdot \exp\left(\frac{h-95}{2H}\right)} \quad (6)$$

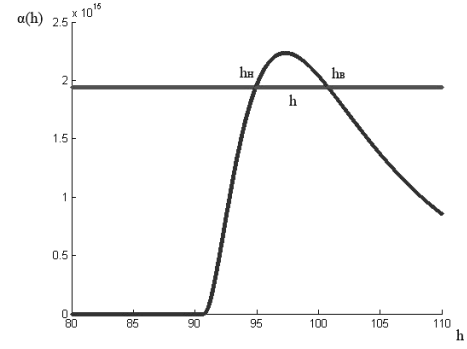


Fig. 2. Effective width of the meteor region.

The noise power depends on interferences field intensity on the given frequency E_n , which may be defined on the basis of empirical data, and effective height of receiving antenna h_a

$$P_n = \frac{(E_n h_a)^2}{R}, \quad (7)$$

where R is the input resistance of the receiver, and

$$h_a = \frac{\lambda}{\pi} \sqrt{\frac{\eta G_{rv} R}{120}}, \quad (8)$$

where η is antenna radiation efficiency.

The minimum electron density depends on the required ration P_{rv}/P_n and calculates by the formula (5).

Obviously, the demanded signal-to-noise ratio in the input of the receiving system could be obtained for values α exceeding values α_{min} . Thus, the line crossing points α_{min} and the function $\alpha(h)$ define the points of the effective meteor region beginning h_b and its end h_e , and effective meteor region where the electron density of meteor trail is enough for communication in accordance with a given signal-to-noise ratio is defined by the expression

$$h = h_e - h_b. \quad (9)$$

And the effective length of the meteor trail defines by following expression

$$l_{ij} = \rho \cos \gamma_z - \sqrt{\rho^2 \cos^2 \gamma_z + h^2 - 2h\rho}, \quad (10)$$

where

$$\rho = R_E + h_e + h, \quad (11)$$

$R_E = 6372.795 \text{ km}$ – the Earth's radius.

Figure 2 shows a relation of the linear electron density versus height, obtained on the basis of expression (1) for the meteoroid of mass 1 gram and velocity 40 km/sec when the maximum value of the linear electron density $\alpha_{max} = 2.1 \cdot 10^{14}$, α_{min} has been calculated according to formulas (5)–(8) for the meteor communication system with following parameters: $P_{tr} = 500$; $G_{tr} = G_{rv} = 20\text{dB}$; $\lambda = 7.5 \text{ m}$; length of the radio link $c = 1000 \text{ km}$, $P_{tr}/P_n = 10$.

Table 1 shows the maximum and minimum electron density, and the effective width of the meteor region, for different parameters of the meteoroid.

TABLE I
ELECTRON DENSITY AND EFFECTIVE WIDTH OF THE METEOR REGION

m,[g]	v,[km/sec]	$\alpha_{max},[el/m]$	$\alpha_{min},[el/m]$	h,[km]
0.25	30	$1.7553 \cdot 10^{14}$	$1.9305 \cdot 10^{15}$	0
0.25	50	$1.1174 \cdot 10^{15}$	$1.9374 \cdot 10^{15}$	0
0.25	70	$3.4078 \cdot 10^{15}$	$1.9422 \cdot 10^{15}$	12.66
0.5	30	$3.4905 \cdot 10^{14}$	$1.9305 \cdot 10^{15}$	0
0.5	50	$2.2349 \cdot 10^{15}$	$1.9374 \cdot 10^{15}$	5.9
0.5	70	$6.8157 \cdot 10^{15}$	$1.9422 \cdot 10^{15}$	13.8
1	30	$6.9811 \cdot 10^{14}$	$1.9305 \cdot 10^{15}$	0
1	50	$4.4698 \cdot 10^{15}$	$1.9374 \cdot 10^{15}$	15.94
1	70	$1.3631 \cdot 10^{16}$	$1.9422 \cdot 10^{15}$	14.37

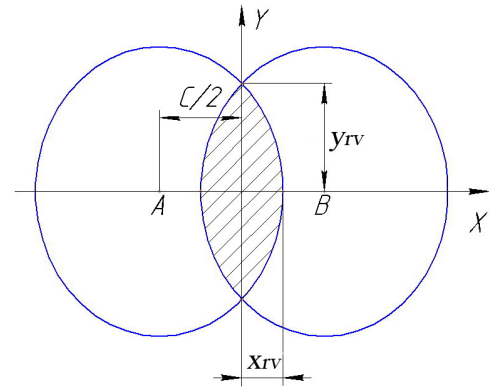


Fig. 3. Radio visibility zone.

TABLE II
EXTREME POINTS OF THE RADIO VISIBILITY ZONE

c, [km]	x_{rv} , [km]	y_{rv} , [km]
500	882.4	1105.4
1000	629.8	1016.3
2000	119.3	509.7

III. ESTIMATOR OF THE METEOR TRAILS SUITABLE FOR COMMUNICATION

A. Radio Visibility Zone

During checking of the suitable for communication meteor trails, it is necessary to take into account the subspace which is simultaneously seen from transmitting and receiving points (radio visibility zone), and also to set the coordinates of entry points of the meteoroid in the meteor region. The radio visibility zone is a part of sphere bounded by the planes tangent to the Earth's surface at the points of transmission and reception. The intersection of these planes with the sphere, form a circle with a radius R_k . The projection of the intersection on the XY plane is shown in Fig. 3, where x_{rv} – the extreme points of X and Y, respectively.

For radio lines AB with a length of c , the extreme points of this area can be calculated by the following relations

$$\begin{aligned} x_{rv} &= \frac{R_k - l}{R_E} \sqrt{R_E^2 - \frac{c^2}{4}}, \\ y_{rv} &= \sqrt{R_k - l}, \end{aligned} \quad (12)$$

where R_k l are given by

$$R_k = \sqrt{(R_E + H + h)^2 - R_E^2}, \quad (13)$$

$$l = \frac{cR_E}{2\sqrt{R_E^2 - \frac{c^2}{4}}}, \quad (14)$$

In Fig. 3 the extreme points of the radio visibility zone is shown.

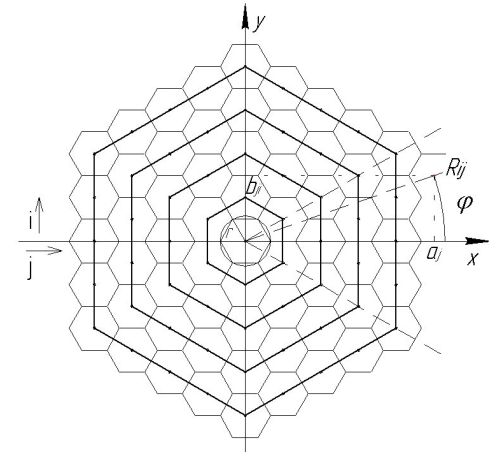


Fig. 4. High density packing in the XY plane as a set of regular hexagons.

Table 2 shows the extreme points values of the radio visibility zone for the radio links of different lengths.

B. Orientation of the Meteor Trail in Space

To determine an entry point of the meteoroid in the meteor region we should a spherical surface, defined by a zone of radio visibility, divide into surface elements of equal area. To minimize the number of surface elements it is necessary to represent a high density packing on the sphere.

Figure 4 illustrates the high density packing in the XY plane as a set of regular hexagons.

IV. CALCULATION OF THE AREAS MOST LIKELY TO APPEAR SUITABLE FOR COMMUNICATION METEOR TRAILS

A. The Probability of the Meteor Trail with the Specular Reflection Point Formation

The probability of forming a meteor trail with specular reflection point, for the meteoroid with zenith angle γ_z and azimuth α , that appear in the neighborhood of the given point $M_{in}(x_{in}, y_{in}, z_{in})$, defined by the expression

$$k \cdot P(x_{in\ ji}, y_{in\ ji}, z_{in\ ji}) = \int_{\gamma_{min}}^{\gamma_{max}} w(\gamma_z) \int_{\alpha_{min}(\gamma_z)}^{\alpha_{max}(\gamma_z)} w(\alpha/\gamma_z) d\alpha d\gamma_z \quad (27)$$

where k is probability coefficient determining that a meteor get into surface element,

$w(\gamma_z)$ is the zenith angle density of probability of the sporadic meteors,

$[\gamma_{min}, \gamma_{max}]$ is the interval of the zenith angles during one, for the given point of meteor entering into the meteor region the specular reflection point is,

$w(\alpha/\gamma_z)$ is conditional probability of the case when the meteor trail with zenith angle γ_z has reduced azimuth α ,

$[\alpha_{min}(\gamma_z), \alpha_{max}(\gamma_z)]$ is the interval of the zenith angles during one, for the given γ_z the specular reflection point is.

Supposing that the probable angles γ_z and α are independent, and α has a uniform distribution in the interval $[0, 2\pi]$ then the expression (27) is being simplified

$$k \cdot P(x_{in\ ji}, y_{in\ ji}, z_{in\ ji}) = \int_{\gamma_{min}}^{\gamma_{max}} w(\gamma_z) \Delta\alpha(\gamma_z) d\gamma_z \quad (28)$$

where $\Delta\alpha(\gamma_z) = \alpha_{max}(\gamma_z) - \alpha_{min}(\gamma_z)$.

To estimate the probability of suitable for communication trail appear in the surrounding of the entry point it could be assumed that γ_z is uniformly distributed in the interval $[0, 2\pi]$. Then the estimate of the probability has the form

$$k \cdot P(x_{in\ ji}, y_{in\ ji}, z_{in\ ji}) = \frac{2}{\pi^2 \cdot N} \sum_{i=1}^N \gamma_{zi} \cdot \Delta\alpha_i(\gamma_{zi}) \quad (29)$$

where $\gamma_{zi} = \gamma_z + i\Delta\gamma$, and $\Delta\gamma = \frac{1}{N}(\gamma_{max} - \gamma_{min})$.

B. Areas Most likely to Appear Suitable for Communication Meteor Trails

To build “hot zones” where the occurrence probability of meteor trails with a specular reflection point exceeds a predetermined value necessary to make the calculation by formula (29) for all coordinates of entry points linked to the centres of the high density packing hexagons that fall into the radio visibility zone.

As an example, the calculation of areas most likely to appear meteor trails with the specular reflection point, take the following initial data: the lengths of the radio links are 2000, 1000, 500 km; the meteor communication system parameters: $R_{tr} = 500W$; $G_{tr} = G_{rv} = 20dB$; $\lambda = 7.5m$; parameters of the meteoroid: mass $m = 1g$, velocity

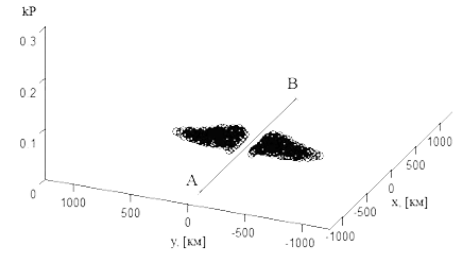
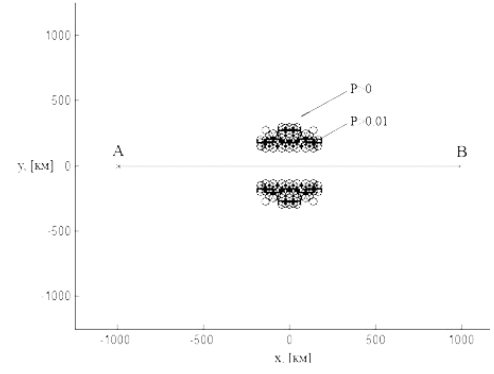


Fig. 6. The areas most likely to appear meteor trails with the specular reflection point for the radio link length 2000 km.

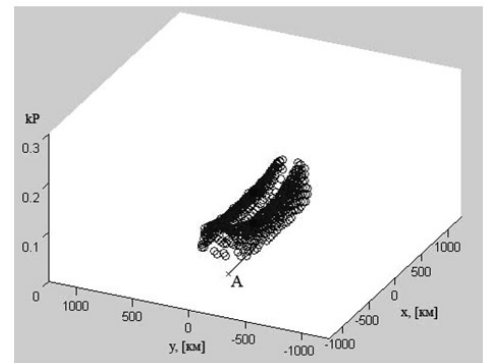
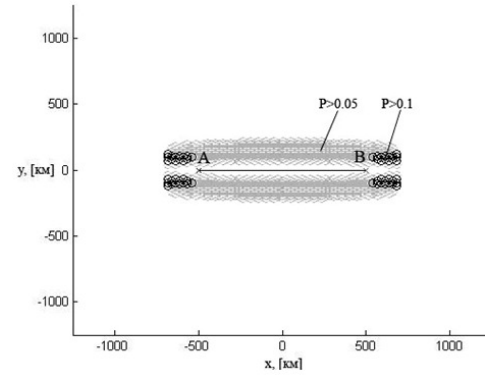


Fig. 7. The areas most likely to appear meteor trails with the specular reflection point for the radio link length 1000 km.

$v = 40km/sec$; characteristics of the meteor trail: the interval of zenith angles $[\gamma_{min}, \gamma_{max}] = [\frac{\pi}{6}, \frac{\pi}{3}]$, α is uniformly dis-

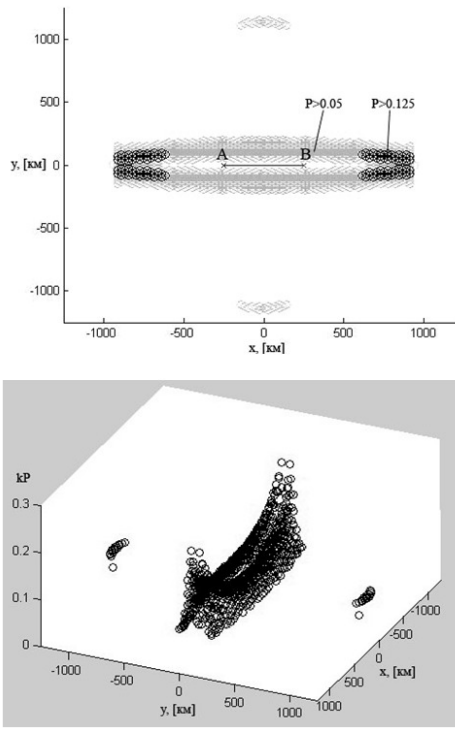


Fig. 8. The areas most likely to appear meteor trails with the specular reflection point for the radio link length 500 km.

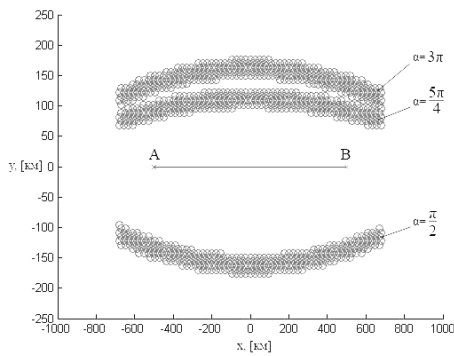


Fig. 9. The areas most likely to appear meteor trails with the specular reflection point for the radio link length 1000 km.

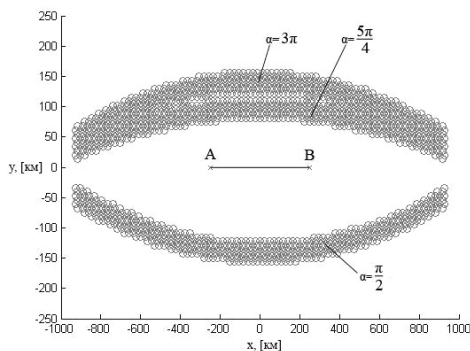


Fig. 10. The areas most likely to appear meteor trails with the specular reflection point for the radio link length 500 km.

tributed in the interval $[0, 2\pi]$. The results of area calculations are presented in Fig. 6-8 for the lengths of radio links 2000, 1000, 500 km respectively.

For the meteor showers with the fixed zenith angle $\gamma_z = \frac{\pi}{6}$ and reduced azimuth $\alpha = \frac{\pi}{2}, \frac{5\pi}{4}, 3\pi$ the areas most likely to appear suitable for communication meteor trails are shown in the Fig. 9, 10 for the radio link lengths 1000 and 500 km respectively.

V. CONCLUSION

As opposed to famous estimates of meteor trails suitable for communication, the proposed method allows to calculate the probability of occurrence in a given area of meteor trails, providing conditions for communications. In the calculations determined the effective length of the meteor trail, where the linear electron density provides the possibility of communications for given parameters of the radio link. The method allows not only determine the probability of a suitable trail, but also to assess the probabilistic contribution of each point of the radio visibility zone. This provides the possibility of building areas most likely to appear trails with the specular reflection point for a given length of the radio link. Definition of the "hot zones" allows to set the basic parameters of antennas and direction of their orientation.

REFERENCES

- [1] T. R. Kaiser, "Theory of the meteor height distribution obtained from radio-echo observations," *Royal Astronomical Society*, vol. 114, pp. 52–62, 1954.
- [2] O. I. Belkovich, *The theory of meteor radio location*. Kazan: KSU, 1977.
- [3] A. A. Weiss, "Elevation, height, and electron density of echoing points of meteor trails," *Australian Journal of Physics*, vol. 12, pp. 65–76, 1959.
- [4] H. V. Kharchenko, "Estimated formation probability of meteoric trails with mirror reflection," in *Proceedings of 6-th IEEE East-West Design and Test Symposium*, St.Peterburg, Russia, Sep. 2010, pp. 289–291.
- [5] I. E. Antipov, J. A. Koval, and V. V. Obelchenko, *Development and improvement of the theory of meteor radio communication systems and synchronization*. Kharkov: Collegium, 2006.
- [6] H. V. Kharchenko, "Method of estimation interval delay in scattering of the signals reflected from the meteor trails," *Radio Engineering*, vol. 160, pp. 56–61, 2010.
- [7] P. S. Aleksandrov, *Lectures on analytical geometry*. Moscow: Science, 1968.