

interconnections between internal entities [1]. This provides users with a specific set of capabilities:

Connector Facilities within Components

Includes remote procedure calls, remote method invocation or message passing mechanisms.

Horizontal Models of Infrastructure Services

Request brokers or publish-subscribe mechanisms between components within the same platform.

Vertical Models of Domain Paradigm

Common semantics and context awareness, and high-level reusable services from transaction and lease support, to multilayer security for multiple platforms.

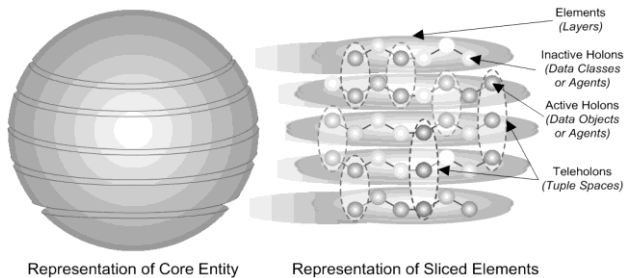


Fig. 1. Tuple Space paradigm consists of distributed Memory Spaces overlaid on multiple platforms [1]

As shown in Fig. 2, the biomimetic model perspective can be projected onto a three-dimensional space, according to the POE Classification Model [1][2]. The POE model represents the different organizational levels of organization, with POE standing for Phylogeny, Ontogeny and Epigenesis.




Fig. 2. POE Classification Model (Phylogeny, Ontology, Epistemology) [2]

Phylogeny

Biological Context: Entail evolution of species genetics

SANET Correlation: This relates to the implementation of heuristic problem solving algorithms (Cooperative EKMs) and the evolution of technology.

Ontogeny

Biological Context: Concerned with cellular growth process, multi-cellular organization, cellular division and differentiation from the parent to child cells. Each child cell processes a copy of the original genome.

SANET Correlation: The perspective of the domain space and calculation of EKM activation energies.

Epigenesis

Biological Context: This involves the adaptation and learning processes. The nervous, immune and endocrine systems are characterized by epigenesis.

SANET Correlation: This space corresponds to the facets or aspects of knowledge acquisition by responding to stimuli and weights adaption feedback.

II. DOMAIN ANALYSIS OF SANETS

A. Co-operative Extended Kohonen Maps (EKMs)

For all nodes in a SANET's control space, procedural controls are formed as a discrete set of commands to be used by reinforcement learning algorithms [12] to be selected from a library of heuristic functions. Autonomous systems theory and reinforcement learning are driven by continuous control space functions [11], as indirect-mapping methods provide finer decision choices than in direct mapping. The accuracy in sensory stimuli control is important where external factors directly affect the network's robustness and reliability. The development of a feature map approach using co-operative EKMs with indirect mapping assists to improve the responsiveness of the mapping process [4][11]:

By Direct Mapping Method

Map inputs of a node directly to sensory stimuli. Indirect-mapping approach maps sensory stimuli indirectly to a node with the utilization of control parameters, including energy discharge, signal strength and node roles as ordinary node, cluster head (routable to sink) or precise anchors (GPS nodes).

By Indirect-Mapping Method

Map the continuous sensory stimuli space to the node; as opposed to direct-mapping that map the continuous sensory stimuli space to discrete directives. Quality evaluators determine optimum clustering using Calinski-Harabasz and Davies-Bouldin [5] criteria.

Traditionally, predictive event capability can be achieved using linear trajectory models in Euclidean space [10]. However, addressing multi-dimensional problems that are outside of the Euclidean space cannot be mapped in isolation, such as network interference and ensuring energy efficiency. This is because it does not factor the entire domain concern of including the problem set into a singular processing model.

Therefore, it is intuitive to convert these dimensional views and decompose them into a singular map of the highest activation energies or stimuli, which is achieved once the maximum value of the integration matrix is calculated for all EKMs for each of the input stimuli received from the SANET's environment. Sensory controls that are insufficiently clarified can result in unexpected or undesirable outcomes, leading to a potential difficulties to navigate a route to the gateway [11][12]. When EKMs are established in the weighted-sum ensemble, a similar problem of un-routable outcomes also takes place. This can be solved by using an indirect EKM mapping method in conjunction with multi-variate regression, whereby the control vector is manipulated indirectly via a control parameter space [11].

The environmental concern shown in Fig. 3. Co-operative EKM Process [4] for a given SANET domain can be summarized in the following statement tasks:

- For initial state described by input vector $u(0)$ in input space U , inclusive of the entire sensory perception;
- Adapt new sequence of control vectors $c(t)$, $t=0, \dots, T-1$, in sensor control space C and calculate activation energies;
- With resultant goal state elaborated by $u(T) \in U$ that adapts the network structure for a desired objective, thus reacting to the stimuli and changing the input state.

This problem will be approached by using a multi-objective approach with co-operative EKM as the modeling function,

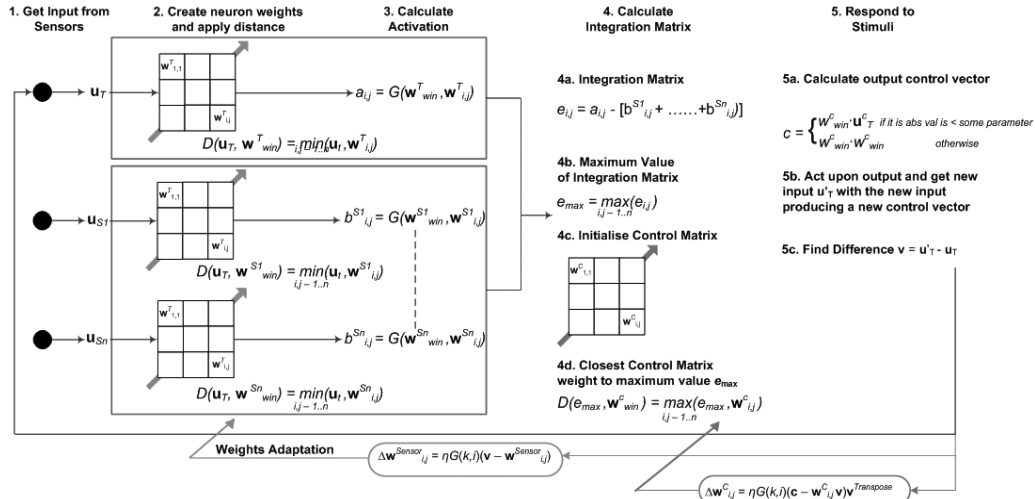


Fig. 3. Co-operative EKM Process [4]

cooperate and compete to self-organize can enable a node to optimize in managing clustering and routing for a dynamic environment, whereby the node's output control is less than the total variable control available. In contrast, Euclidean and the weighted-sum ensemble methods reach detrimental outcomes, even though the SANET may implement a continuous sensory control space as proposed by Low [10].

B. Multi-Objective Meta-Heuristic Algorithm (MMA)

The field of meta-heuristics is about overlaying different heuristic methods to yield an optimal result. In particular, nature-inspired functions are most suitable when considering the learning capability of the SANET network. This is because unlike trajectory functions, which are concerned with only local thresholds to yield a result, nature inspired functions take a more holistic view of the dynamic, evolving system. In essence, by combining a multi-dimensional approach to analyzing a given dataset, we can enhance the regenerative learning capability for any given heuristic optimization model. Current experiments for SANET modeling examine genetic algorithms and Particle Swarm Optimization (PSO) [6], as they both implicit-based reinforcement learning methods that attempt to seek a long term advantage through a representation set of scalar rewards.

The application of the heuristic algorithm follows the approach of applying EKM principles to the problem domain in SANETs [5][6]. This requires the modeling map to be translated into a training vector to be processed against a scalar rewards vector, which reflects the optimum energy or routing condition; depending on the current environmental concerns of the SANET network. The number of evolutions or epochs to determine an acceptable result will affect the quality of the process, but there requires a balance between obtaining a quality evaluation, which requires more processing time and is power intensive, with minimizing the time to process the heuristic function for resource conservation. The implementation method for meta-heuristic functions in the experimental model is established procedurally as shown in Fig. 4. Multi-Objective Meta-Heuristic Process [4].

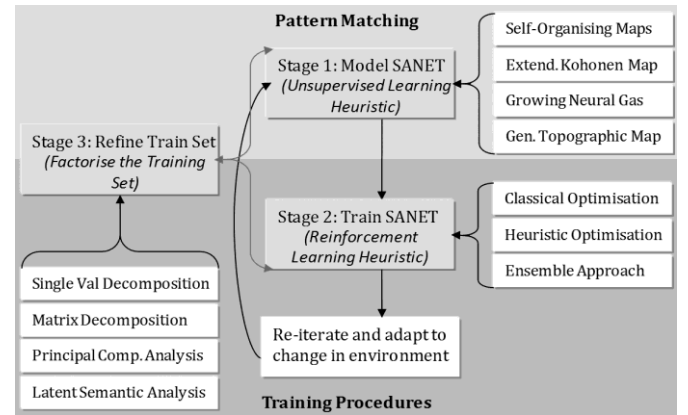


Fig. 4. Multi-Objective Meta-Heuristic Process [4]

• Stage 1: Model Domain Environment (*Phylogenical*)

This stage is about performing an Unsupervised Learning Heuristic on the environment. This involves modeling the environmental concerns to determine how the data should be organized for optimum clustering and routing mechanisms.

The current experiment considers the use of EKM to model the SANET environment from the input sensory perception. This process is autonomous and occurs at the beginning of the analysis of the SANET domain.

• Stage 2: Train for Environment (*Ontological*)

This stage is about performing a Reinforcement Learning Heuristic. This allows the SANET environment to be aware of its context, and learn from its own experience and that of its cooperative actors.

The experiment incorporates genetic algorithmic heuristics to achieve learning capability. A classical technique such as brute-force analysis is computationally inefficient, and it is not feasible to consider all outcomes that lead to an optimum solution, only the most suitable in the current state in time.

• Stage 3: Refine Training Set (*Epigenetical*)

This stage is about factorizing the Training Set. This

optimizes the training set for a given learning heuristic to a singular vector, reducing invariability for long-term forecasting.

The current experiment considers general matrix decomposition techniques to reduce noise and other variability in the training set. This is necessary to select an ideal candidate that establishes the fitness condition for the SANET environment, such as maintaining the minimum energy condition and optimizing available network bandwidth.

III. EXPERIMENTAL MODEL

The evaluation of co-operative EKM on SANETs is executed using the MATLAB environment originally conceived by Chaczko, et al [4]. The simulation framework, shown in Fig. 5. MATLAB Simulation Environment [5] allows for convenient monitoring and tracking of SANET events by pre-assigning event trajectories in the network field.

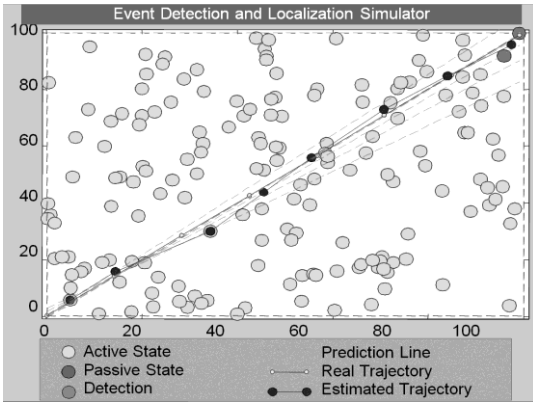


Fig. 5. MATLAB Simulation Environment [5]

A. General Assumptions

- The topology of the SANET network is two-dimensional, such that altitude is constant.
- All nodes are powered at 100% energy capacity. Energy dissipation is calculated uniformly using the inverse square law.
- The event trajectory is not predefined, such that the beginning and end points are calculated randomly using the Fast Mersenne-Twister method.
- The network is considered to be interference free, such that RF communication concerns are not evaluated in the experimental model.

B. Experimental Procedure

The experiment is completed with the methodology by establishing the following simulation constraints:

1. A population of n nodes is distributed randomly via Fast Mersenne-Twister, in a two-dimensional network of 100m x 100m. Sample node populations include:

- | | | |
|---------|----------|----------|
| a. 100; | d. 1000; | g. 4000; |
| b. 250; | e. 2000; | h. 5000. |
| c. 500; | f. 3000; | |

2. An event trajectory is executed from a point in the network area; of which the test path course is either:

- a. *Linear Path*: A linear path consists of an event trajectory where the entry and exit point from the area is of constant gradient.
- b. *Arc-formation Path*: Arc-formation consists of an event trajectory where the entry and exit point will either be increasing or decreasing in gradient, forming a circle segment.
- c. *Pseudo-random Path*: A pseudo-random path using the Mersenne-Twister method combines 2(a) and 2(b) at various points throughout the trajectory, until it reaches the exit point.

3. The algorithm selects the route from the node in range of the approximate trajectory to be established to the sink; such that the closer the algorithm is to calculating the event path, the more optimum the route will be to establish successful communications to the sink.

- a. *Linear Approximation*: Linear approximation estimates the approximate trajectory to determine the route path with Euclidean geometry to calculate the final point of the event, based on the current nodes that are in contact with the event and tracing a path between the previous and current nodes.
- b. *Co-operative EKM with PSO*: Co-operative EKM use an indirect-mapping SOM map to train the control parameters in which to converge at the final trajectory point; in such a fashion to actively train the neural network to seek positive outcomes to determine a route from the trajectory's path to the sink.

In conjunction, the reinforcement learning heuristic applied to the SOM map as a training vector set, and a vector test set is applied to maintain accuracy of path estimation. Using Particle Swarm Optimization [6], the shortest Euclidean distance between the actual trajectory point and the nearest neighboring node is nominated within the routable path to the sink.

4. The experiment is executed for 1000 iterations to calculate the mean rate of successful identification of the trajectory's target point, when the simulated event exits the network area:

- a. A maximum margin of error is a 2m x 2m area where a final approximate point is determined.
- b. A successful identification is where the final end-point is within a 98% confidence interval of the entire network. Any other estimation outside of this threshold region is identified as a failed identification and is rejected.

IV. EXPERIMENTAL RESULTS

The results demonstrate that in comparison to linear approximation and co-operative EKM with PSO, the final results show there is potential when pseudo-random trajectory tracking is required. While linear approximation of pseudo-random trajectories are expected to perform inadequately as it responds best to constrained, predictable local minima conditions; co-operative EKM demonstrate a perceptible improvement in the identification rate over linear

approximation. This is evident with a greater node population, as the granularity of determining a nearest neighboring node to route is reduced for the fixed size of the network.

As shown in, there is approximately a 2-fold improvement in detection rates for the pseudo-random trajectory compared to linear approximation. This indicates that while the co-operative EKM with PSO model shows promise, there is more work to be done to improve and make a more consistent prediction mechanism. Current prediction rates are insufficient to ensure long-term routing conditions, which indicate the process of refining the training set for remodeling is necessary to improve the node routing capability.

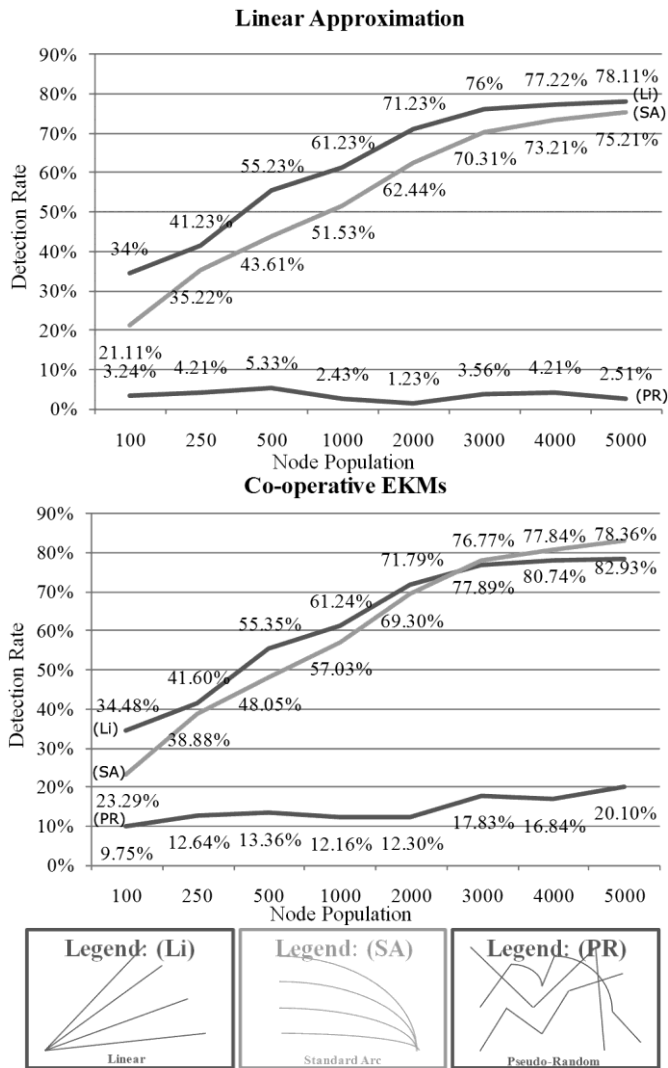


Fig. 6. Experimental Results of Detection Rates

The analysis of co-operative EKMs as shown below in Table 1 & 2, when assessed in terms of performance of pseudo-random tracking, requires more analysis into the algorithmic procedure. In particular, the thresholds established for determining positive or negative learning reinforcement is an issue that needs to be evaluated for an in-depth assessment. The tolerance levels used to calculate the thresholds is important, as subtle variations in tolerance may yield undesirable results. As a case in point, reducing tolerance

levels too far will result in the inflexibility of the algorithm to adapt to changes the event trajectory; the corollary is that generous tolerance levels will yield undesirable tracking results when noise or faulty nodes produce invalid sensory data.

TABLE 1 & 2
COMPARATIVE ASSESSMENT AND EVALUATION

LINEAR APPROXIMATION	
Descriptor	Elaboration/Observation
Quantitative Assessment	<ul style="list-style-type: none"> Linear approximation is limited with small node numbers as the sparse distribution is a poor fit to the estimated Euclidean geometry path. Linear approximation converges to local minima or maxima too rapidly that prevents a consistent prediction or targeting of the final event trajectory
Qualitative Assessment	<ul style="list-style-type: none"> Linear approximation cannot compensate for path obstruction or unpredictable movement without further algorithmic improvement.
CO-OPERATIVE EKMS WITH PSO	
Descriptor	Elaboration/Observation
Quantitative Assessment	<ul style="list-style-type: none"> Demonstrates an indirect-mapping EKM can provide detection to optimize for local obstruction and global target identification concerns.
Qualitative Assessment	<ul style="list-style-type: none"> Preliminary results show a smoother tracking mechanism to monitor events in real-time, compensating for random events [11][13]. Co-operative EKMS with PSO, in conjunction with an enhanced training set refinement mechanism, will yield more consistent results as due to an optimal training vector.

As a consequence, the potential of Co-operative EKMs to identify events within a SANET network is evident; but as with all passive learning heuristic methods, a heuristic ensemble approach using MMA is necessary to train the algorithm to evaluate and determine the tolerance thresholds that are most suitable for the current conditions. The implementation of co-operative EKMs with alternative heuristic algorithms such as genetic algorithms will need to be considered in future to evaluate improvement in the mean identification rate. Furthermore, a feedback mechanism incorporating training set factorization is required to minimize error rates and ensure a consistent set of data outcomes, and allow for more fluid responses in the routing and tracking network functions.

V. ANALYSIS OF RESULTS

A. Hybrid Holonic Architectural Domain Mapping

The consideration of the Holonic Hybrid architecture corresponds with the needs of the SANET middleware infrastructure, with holons represented as individual resource concerns of which the holonic architecture encapsulates the pool of shared resources for the entire network, and the teleholons represented as the collaboration or synchronization

between resource holons. As such, it addresses SANET management from two central views:

- *Holonic Concerns*: Horizontal perspectives for a single cluster; such as the energy conservation task of ensuring optimal sizes for intra-cluster management.
- *Telonic Concerns*: Vertical perspectives for clusters and external networks, where extra-cluster interaction can facilitate and negotiate common or shared resources that require handover or synchronization.

B. Cooperative EKM Heuristic Validation

The notable variability in the identification rate indicates a need to improve the quality of training mechanisms to reinforce positive selection processes, so the aggregation of the final routing selection is optimal for the system environment. Furthermore, the implementation of refining the training set is necessary to ensure that the SANET modeling functions do not introduce internally generated erroneous data that will impact on the system's ability to make future predictions based on historical trends.

The current yield in the trajectory projection is insufficient to make meaningful estimations, as the current result is outside the upper 2 standard deviations required to ensure a 95% confidence interval in accurate tracking projections. This indicates that further work is required before an assessment can be modeled on physical test-bed environments; as real-world scenarios need to be quantitatively evaluated on more stable and consistent system models.

In particular, further examination is required to determine the trade-off between yielding an efficient route which will be more computationally intensive, or a best-effort route that will be more energy conservative. However, the distributed nature of SANETs means that computational calculations can take place for each routing hop, so that while the local calculations are considered for each route, a global picture can be established for the entire route back to the sink or gateway.

VI. CONCLUSION

The method of adaptive SANET management with cooperative EKMs coupled with multi-objective heuristic functions show promise, with the current results demonstrating indirect-mapping EKM generating more proficient routing and clustering conditions when compared to direct-mapping EKMs and trajectory functions. Furthermore, the control parameters of the indirect-mapping EKM can be trained with recursive least squares to allow convergence and

better optimization, with choices in the reinforcement learning technique providing context-aware outcomes to optimize the reinforcement learning capability of the SANET management.

ACKNOWLEDGEMENTS

We acknowledge the contribution of Michal Nikodem for his prior development of the MATLAB simulation framework to assess the viability for Extended Kohonen Maps in wireless sensor networks.

REFERENCES

- [1] Chaczko, Z. et al, (2005), A Bio-inspired Telecollaboration Service Taxonomy: Usability Related Concerns, Broadcom 2008
- [2] Chaczko, Z. et al, (2007), NIE Models of Biomimetic Software Systems, CSIRO ICT Centre Conference.
- [3] Chaczko, Z., Davis, D., Mahadevan, V. (2004), New Perspectives on Teaching and Learning Software Systems Development in Large Groups, IT Higher Education & Training 2004, Istanbul, Turkey
- [4] Chaczko, Z; Chiu, C. (2009), Cooperative EKMs for Wireless Sensor Networks, Eurocast 2009, Vol.12, pp. 304–305, published by Gran Canarias Las Palmas University Press
- [5] Chaczko, Z; Nikodem, J; Klempous, R; Nikodem, M; Sensors Localisation Methods in the COSA Framework (2007), AusWireless: The 2nd International Conference on Wireless Broadband and Ultra Wideband Communications, pp. 60
- [6] Clerc, Maurice (2006), Particle Swarm Optimization: ISTE (International Scientific and Technical Encyclopedia), translated from L'optimisation par essais particuliers. Versions paramétriques et adaptatives, Hermès Science, 2005.
- [7] Ghosh, J. and Nag, A. (2001). An overview of radial basis function networks. In R. J. Howlett and L. C. Jain, editors, *Radial Basis Function Networks: New Advances in Design*, pp. 1–36. Physica-Verlag, New York
- [8] Kaelbling, L. P., Littman, M. L., and Moore, A. W. (1996). Reinforcement learning: A survey. *J. Artificial Intelligence Res.*, pp. 237–285
- [9] Kohonen, T. (2000). *Self-Organizing Maps*. Springer, New York, 3rd Edition.
- [10] Low, K. H., Leow, W. K., and Ang, Jr., M. H. (2004). Task allocation via self organizing swarm coalitions in distributed mobile sensor network. In Proc. 19th National Conference on Artificial Intelligence (AAAI-04), pp. 28–33
- [11] Low, K. H., Leow, W. K., and Ang, Jr., M. H. (2005), An Ensemble of Cooperative Extended Kohonen Maps for Complex Tasks In *Neural Computation*, Vol. 17, Issue 6, pp. 1411-1445, published by MIT Press
- [12] Mill'an, J. del R., Posenato, D., and Dedieu, E. (2002). Continuous-action Qlearning. *Machine Learning*, pp. 249–265.
- [13] Sharkey, A. J. C. and Sharkey, N. E. (1997). Combining diverse neural nets. *Knowledge Engineering Review*, pp. 231–247.
- [14] Szyperki, C. (1998), Emerging component software technologies - a strategic comparison, *Software - Concepts and Tools*, Vol 19, No 1, p2-10.